

# KITO

## Manual Chain Hoist CB Model

up to 50 t

**FELTES** GEAT  
Leichtbau-Portalkrane



**Easy handling**  
**Long-lasting and**  
**reliable**



- > **Double casing**  
for protection against  
dust and water
- > **Impact proof  
gear casing**  
resistant against  
exterior impacts
- > **Precise gear  
mechanism**  
smooth and easy  
handling

**Made in Japan!**

Source: Meyer Werft

[www.kito.net](http://www.kito.net)  
[www.feltes-gmbh.de](http://www.feltes-gmbh.de)



**KITO HEBEZEUGE**


Mit Sicherheit das Original

Wide hook opening  
top and bottom hook

High performance brake  
safety beyond the regular  
limits

Nickel plated load chain  
grade 100 (V) (1000N/mm<sup>2</sup>),  
in accordance with standard  
EN 818-7

Chain guide  
silent and easy operation

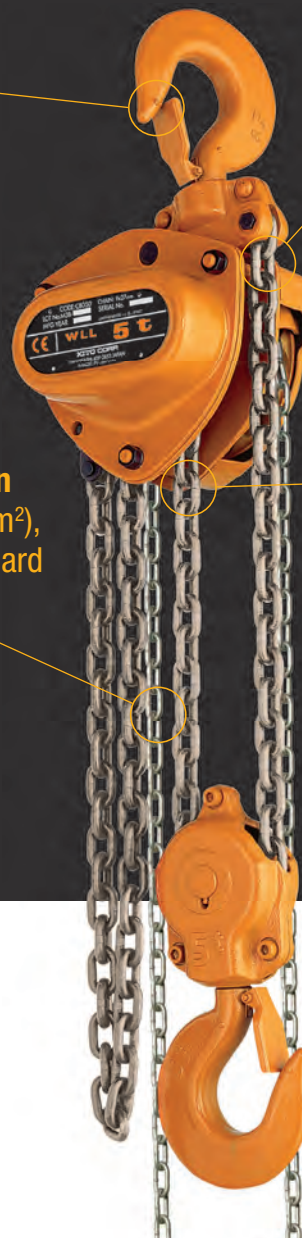


**Optional chain bucket:**

Weather-proof canvas. Recommended for large lifting heights

**Optional overload limiter:**

Protects the operator from faulty operation with overload

**Option: Universal Trolleys  
TS model**

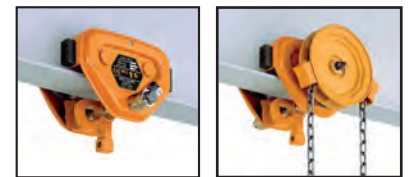

**Technical data**

Type	Capacity, kg	Standard lift, m	Hand pull to lift full load, daN	Chain pulled to lift load 1 meter, m	Load chain diameter, mm	Chain fall	Net weight, kg	Weight for additional 1 m lift, kg
CB005	500	3,0	23,5	25	5,0 x 15,1	1	11,0	1,5
CB010	1000	3,0	28,4	43	6,3 x 19,1	1	12,5	1,8
CB015	1500	3,0	34,3	57	7,1 x 21,2	1	15,5	2,1
CB020	2000	3,0	35,3	70	8,0 x 24,2	1	20,0	2,3
CB025	2500	3,0	32,3	99	9,0 x 27,2	1	27,0	2,7
CB030	3000	3,0	35,3	114	7,1 x 21,2	2	24,0	3,2
CB050	5000	3,0	33,3	198	9,0 x 27,2	2	41,0	4,4
CB075	7500	3,5	34,3	297	9,0 x 27,2	3	63,0	6,2
CB100	10000	3,5	35,3	396	9,0 x 27,2	4	83,0	7,9
CB150	15000	3,5	36,3	594	9,0 x 27,2	6	155,0	11,4
CB200	20000	3,5	35,3 x 2	396 x 2	9,0 x 27,2	8	235,0	15,8
CB300	30000	3,5	42,1 x 2	495 x 2	9,0 x 27,2	10	310,0	19,2
CB400	40000	3,5	42,1 x 2	693 x 2	9,0 x 27,2	14	480,0	26,2
CB500	50000	3,5	48,0 x 2	792 x 2	9,0 x 27,2	16	640,0	29,7

**Disclaimer:**

KITO does not assume liability for inappropriate usage of products.  
Operating instructions must be followed at all times.  
Subject to technical change, misprint and errors.

**Contact**

Feltes GmbH / Marie-Curie-Straße 9 / D-40822 Mettmann  
Tel. +49 (0) 2104 / 81 84 120 / Fax +49 (0) 2104 / 81 84 129  
info@feltes-gmbh.de / www.feltes-gmbh.de