

JUMBOFLEX

Industrial Hoses



HUANYU HOSE CO., LTD.

No.367, Sec. 3, Zhongshan Rd., Tanzi Dist.,
Taichung City 427, Taiwan
TEL: +886-4-25337039. 25337226
FAX: +886-4-25337296
E-MAIL: hose@jumboflex.com.tw
WEBSITE: www.jumboflex.com.tw



Jumboflex Industrial
Hose Manufacturer



Jumboflex Industrial
Hose Manufacturer



Jumboflex Industrial
Hose Manufacturer



SINCE 1980

Woodworking / Foodstuffs
Electronics / Environmental
Plastics / Agriculture



• About **JUMBOFLEX** •

Huanyu Hose Co., Ltd. was established by Mr. Jang Yuan Fang, son of Yao Wei President, and founder Mr. Jang Yi Sheung, dedicated to expanding the development of the industrial hoses business.

Huanyu has 30 years of experience and specialized in manufacturing a wide range of industrial hoses to its customers in the most diverse industries such as wood dust collection, welding fume and vehicle exhaust extraction systems. We provide products with high quality, reasonable prices and efficient service.

We invite you to take a look at our products to see which ones meet your requirements. If you find the ideal hoses, please do not hesitate to contact us. As a young and innovative company, **Huanyu** will always be willing to overcome the challenge to satisfy its customers.



Jang Yuan Fang
President

History

- 1980 – Established our parent company, Yao Wei Plastic Co., Ltd., in Taichung, Taiwan, which specializes in rubber products.
- 1990 – Commenced developing engineering plastics business.
- 1998 – Established our company, Jer Yeu Industrial Co., Ltd., which works in innovation of a wide range of industrial hoses to meet each customer’s demands with new and updated products.
- 2000 – Technical cooperation with a leading German company.
- 2005 – Established the office in Kunshan, China.
- 2008 – Established a new company, Yang Chiuan Industrial. Co., Ltd., of production area of 2,300 m².
- 2010 – Established offices in Tianjin, Wuhan, Chengdu, China.
- 2012 – Established the new warehouse, which the total company area reached to 7,000 m².
- 2014 – Yang Chiuan Industrial was renamed as Huanyu Hose Co. Ltd., and a new brand name, JUMBOFLEX, was created.
- 2017 – Established the new product line of 6000 m².
- 2019 – Established the brand new golden elephant LOGO.
- 2020 – After expansion, the total company area reached to 15,000 m² and products spanned to new Smoke Evacuation Tube and Breathing Tube.
- 2022 – Certified with ISO 9001: 2015.

Catalogue index

▶ Flexible Ducting Hoses P4-10
▶ Food and Pharmaceutical Industry P11-15
▶ Abrasion Resistant Suction Hoses P16-21
▶ Antistatic And Electrically Conductive Hoses P22-25
▶ High Temperature Exhaust Extraction Hoses P26-32
▶ Industrial Tubes, Connectors, Clamps P33-42

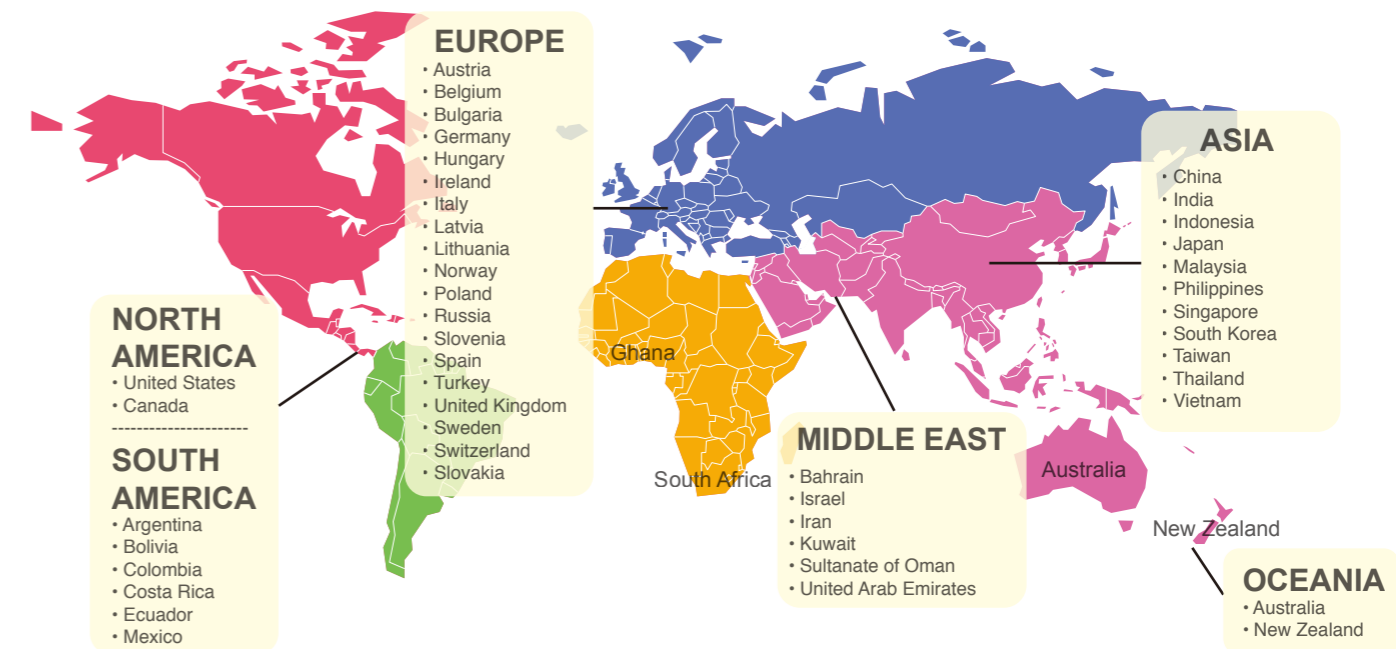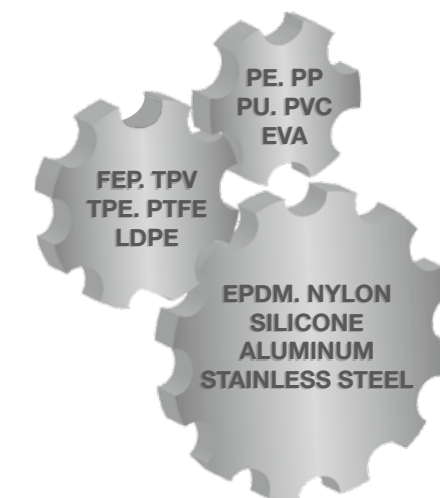

INTERNATIONAL CERTIFICATION - RoHS • FDA • UL

Appendix-1: Horizontal Burning Test

UL No. 94
ASTM D635, IEC 60695-11-10

Specimen Review: 1) Radius = 1.3 mm, Width = 31.75 mm, Length = 125 mm and above are smooth. 2) Conditioned >48/23/50%RH. 3) Width 13.9 ± 0.5 mm. Specimen didn't meet the standard size. AR, 2014-05-08.

Preparation of Test Flame:
Gas Flow Rate: 155 mL/min (150% M/min)
Back Pressure: 1 mm water (10 mm water)

Specimen No.	Thickness (mm)	Time (s)	Drop (mm)	Flame Class
Set # 1	Material: 2-1-0 P2 B PLB HOSE (0.3 mm)	Color: TP		
1	0.428	40	75	1 3 1
2	0.417	42	75	1 3 1
3	0.439	84	75	1 3 1

Test Date: 2014-05-07

Notes: 1) Specimen length 100 mm, distance between 25 mm reference mark. 2) Linear burning rate = 45% (but indicated if 25 mm mark not passed).

Lab Ambient: 22 °C (72°F) and 50% RH (50% RH)

Underwriters Laboratories Taiwan Co., Ltd.

Project No: 07CA2560 File SV17005 Page 4

HORIZONTAL BURNING TEST: HB (ASTM D635, IEC 60695-11-10)

Specimen Review: 1) Conditioned >48/23/50%RH. 2) Radius < 1.3 mm. 3) Width 13.9 ± 0.5 mm.

Specimen No.	Thickness (mm)	Time (s)	Length (mm)	N ₁	Burning Rate (mm/min)	Flame Class
Set # 1	Material: 矽質軟性管 - SIZ	Color: Brown				
1	0.795	0	0	(2)	—	Yes
2	0.698	0	0	(2)	—	No
3	0.633	0	0	(2)	—	No

Test Date: 2014-05-07

Notes: 1) Specimen length 100 mm, distance between 25 mm reference mark. 2) Linear burning rate = 45% (but indicated if 25 mm mark not passed).

Appendix-2: 50W (20 mm) Vertical Flammability

UL No. 94, 69
ASTM D1801, IEC 60695-11-10

Specimen Review: 1) Radius = 1.3 mm, Width = 13.9 mm, Length = 125 mm and above are smooth. Specimen didn't meet the standard size. AR, 2014-05-08.

Preparation of Test Flame:
Gas Flow Rate: 155 mL/min (150% M/min)
Back Pressure: 1 mm water (10 mm water)

Specimen No.	Thickness (mm)	Time (s)	Length (mm)	N ₁	Burning Rate (mm/min)	Flame Class
Set # 1	Material: 矽質軟性管 - SIZ	Color: Brown				
1	0.713	0	0	(2)	—	Yes
2	0.316	0	0	(2)	—	No
3	0.313	0	0	(2)	—	No

Test Date: 2014-05-07

Notes: 1) Specimen length 100 mm, distance between 25 mm reference mark. 2) Linear burning rate = 45% (but indicated if 25 mm mark not passed).

SGS Test Report

No. CE20117002A Date: 2014/05/16 Page 1 of 5

JER YEU INDUSTRIAL CO., LTD.
NO. 367, SEC. 3, ZHONGSHAN RD., TAINI DIST., TAIPEI CITY, TAIWAN

The following sample(s) was/were submitted and identified by/on behalf of the applicant as:

Sample Description: 1) ADJUST 2 INCH HOSE
Sample Receiving Date: 1) 2014/05/07
Testing Period: 1) 2014/05/07 to 2014/05/08

Test Requested: 1) As specified by client, with reference to RoHS Directive 2011/65/EU Annex II to determine Cadmium, Lead, Mercury, Cr(VI), PBBs, PBDEs contents in the submitted sample.

Test Method: 1) Please refer to next pages.
Test Result(s): 1) Based on the performed tests on submitted samples, the test results of Cadmium, Lead, Mercury, Cr(VI), PBBs, PBDEs comply with the limits as set by RoHS Directive 2011/65/EU Annex II, meeting 2014/05/08.

TÜV Rheinland

Prüfbericht - Nr.: 0114050514a 002 Seite 1 von 2

Auftraggeber: JER-YEU INDUSTRIAL CO., LTD.
No. 367, Sec. 3, Zhongshan Rd., Taini Dist., Taichung City 42749, Taiwan, R.O.C.

Objekt: 1 Silicon, white

Bezeichnung: SILICONE FOOD HOSE (P2 B PLB) 2014/05/07

Prüfungsort: TÜV Rheinland Hong Kong Ltd.

Prüfungstermin: 2014-05-07

Prüfungsergebnis: The test results are the measurements stated in the test report.

geprüft: tested by: Anne Chen
kontrolliert: checked by: Carl Chang

Bureau Veritas Consumer Product Services Germany GmbH

Member of the Bureau Veritas Group
Report No.: 15TH0226 Rev.1, page 4 of 4

4 Performance of tests and results

4.1 Surface resistance test of parts of enclosures of non-metallic materials according to EN 13463-3, subchapter 3.5.8

The TPV HOSE was tested according to the regulations of EN 13463-3, subchapter 3.5.8 for surface resistance test of parts of enclosures of non-metallic materials. The tests were carried out on 2014-05-02.

Test equipment: Insulation tester, Endress+Hauser, Metro 0500 (BV No. 1112, next cal. 01/16)

Conditions 24 h before and during the test: -Temperature: 22 °C
Relative humidity: 31 %

Test voltage: 500 Vdc
Test duration: 1 min
Surface resistance: 2,80 kΩ
Test result: Pass

5 Final result

The TPV HOSE has a resistance of 2,80 kΩ, so it has passed the surface resistance test according to EN 13463-3, subchapter 3.5.8.

SGS 測試報告

報告編號: CT201610077 日期: 2016/04/14 頁數: 1 of 3

JER YEU INDUSTRIAL CO., LTD.
NO. 367, SEC. 3, ZHONGSHAN RD., TAINI DIST., TAIPEI CITY, TAIWAN

下列樣品係由申請人或其代理人所提交及標識 (The following sample(s) was/were submitted and identified by/on behalf of the applicant as):

樣品名稱 (Sample Name): PVC HOSE (矽質軟性管)

樣品描述 (Sample Description): 矽質軟性管 (SIZ)

樣品材料 (Sample Material): PVC

樣品產地 (Country of Origin): TAIWAN

樣品接收日期 (Sample Receiving Date): 2016/03/18

測試日期 (Testing Period): 2016/03/18 to 2016/03/19

測試要求 (Test Requested): 1) As specified by client, with reference to U.S. Food and Drug Administration (FDA) 21 CFR 175.300 (Condition of use E) to conduct test. Please refer to result table for testing item(s).

測試結果 (Test Results): 1) 請見下一頁 (Please refer to next pages).

SGS Test Report

No.: CT201610077 Date: 2016/03/19 Page: 1 of 3

JER YEU INDUSTRIAL CO., LTD.
NO. 367, SEC. 3, ZHONGSHAN RD., TAINI DIST., TAIPEI CITY, TAIWAN

The following sample(s) was/were submitted and identified by/on behalf of the applicant as:

Sample Submitted By: JER YEU INDUSTRIAL CO., LTD.
Sample Description: PVC HOSED HOSE
Sample Material: PVC
Country of Origin: TAIWAN
Sample Receiving Date: 2016/03/18
Testing Period: 2016/03/18 to 2016/03/19

Test Requested: 1) As specified by client, with reference to U.S. Food and Drug Administration (FDA) 21 CFR 175.300 (Condition of use E) to conduct test. Please refer to result table for testing item(s).

Test Results: 1) Please refer to next pages.

SGS TEST REPORT

Mechanical & Hardgoods Laboratory Report No.: HL30277A/2016
Page: 1 of 2
Date: MAR. 18, 2016

JER-YEU INDUSTRIAL CO., LTD.
No.367, Sec.3, Zhongshan Rd., Taini Dist., Taichung City, 42749 Taiwan


The following merchandise was submitted and identified by/on behalf of the applicant as:

Product Description: PTFE AIR HOSE
Manufacturer/Vendor: JER-YEU INDUSTRIAL CO., LTD.
Country of Origin: Taiwan

We have tested the submitted sample(s) as requested and the following results were obtained:

Test Requested: High Temperature Test
Test Method & Result: ---See following sheets---

Date of Receipt: Mar. 11, 2016
Testing Period: Mar. 11, 2016 - Mar. 18, 2016

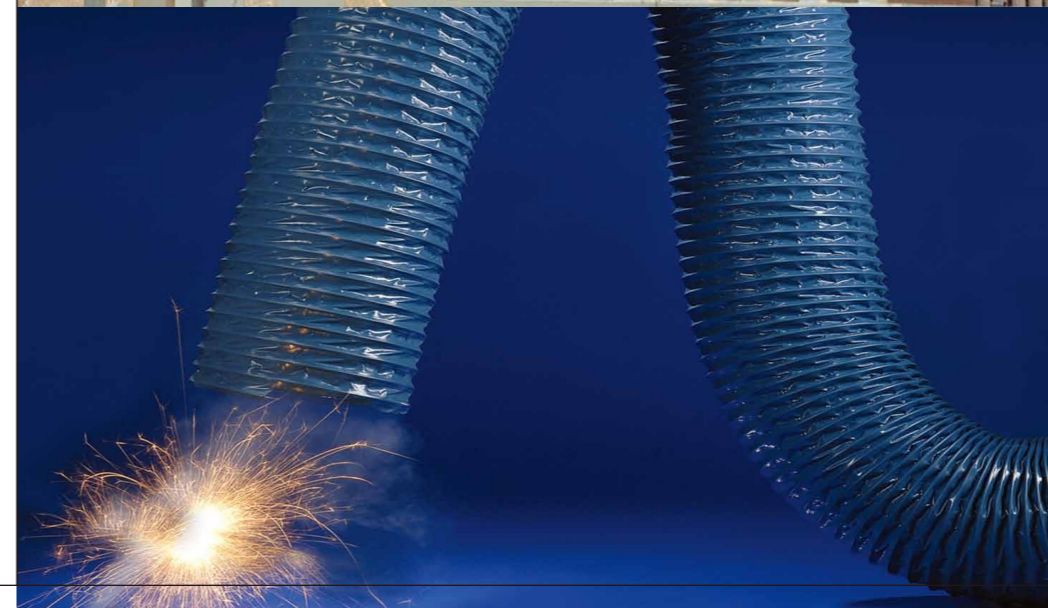

FLEXIBLE DUCTING HOSES

Woodworking
Welding Fume
Electronics
Dust Collection
Air Prevention

J 1-4 PVC FABRIC AIR HOSE



Applications:

- for welding gas extraction
- air conditioning and ventilation of fumes, light duty dust extraction, and air movement

Construction:

- spring steel wire integrated in wall
- fabric-reinforced wall
- wall thickness 0.35 mm approx.

Material:

- wall: PVC coated fabric
- spiral: spring steel wire

Standard Color:

- grey and blue



Properties:

- highly flexible and compressible 6:1
- fabric reinforced
- good resistance to alkalis and acids
- good resistance to chemicals, UV and ozone
- capable of electrostatic discharge by grounding the spiral
- flame-retardant according to UL94-V2

Temperature Range:

- -10 °C approx. to +80 °C approx.
- short time to +100 °C approx.

Specification:

- ø 38 to ø 406 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
38	48	0.280	0.170	48	0.17	10	1-4-038-000
51	60	0.240	0.150	60	0.18	10	1-4-051-000
63	72	0.200	0.120	72	0.20	10	1-4-063-000
76	85	0.160	0.080	85	0.23	10	1-4-076-000
80	89	0.150	0.070	89	0.25	10	1-4-080-000
90	99	0.140	0.060	99	0.29	10	1-4-090-000
102	111	0.120	0.050	111	0.32	10	1-4-102-000
114	123	0.110	0.045	123	0.38	10	1-4-114-000
127	136	0.100	0.035	136	0.42	10	1-4-127-000
140	149	0.090	0.033	149	0.45	10	1-4-140-000
152	161	0.080	0.032	161	0.55	10	1-4-152-000
160	169	0.075	0.025	169	0.65	10	1-4-160-000
178	187	0.070	0.020	187	0.75	10	1-4-178-000
203	212	0.060	0.020	212	0.86	10	1-4-203-000
254	263	0.050	0.010	263	1.20	10	1-4-254-000
305	314	0.040	0.006	314	1.30	10	1-4-305-000
355	364	0.035	0.006	364	1.70	10	1-4-355-000
406	415	0.030	0.006	415	2.20	10	1-4-406-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 1-8 ALUMINUM FOIL AIR HOSE 2PLY



Applications:

- exhaust air ventilation

Construction:

- two ply aluminum foil clamped into spring steel wire

Material:

- wall: aluminum foil
- spiral: spring steel wire

Standard Color:

- silver



Properties:

- axially compressible
- small bending radius
- very good low temperature flexibility
- kink-proof

Temperature Range:

- -20 °C approx. to +100 °C approx.

Specification:

- ø 50 to ø 300 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Stock Lengths m	Order No.
50	57	0.24	0.015	10	1-8-050-000
63	70	0.20	0.013	10	1-8-063-000
76	83	0.16	0.013	10	1-8-076-000
100	107	0.12	0.012	10	1-8-100-000
125	132	0.10	0.010	10	1-8-125-000
150	157	0.08	0.007	10	1-8-150-000
200	207	0.06	0.006	10	1-8-200-000
250	258	0.05	0.024	10	1-8-250-000
275	283	0.04	0.024	10	1-8-275-000
300	308	0.04	0.024	10	1-8-300-000

Delivery Variants: customer-specific product marking, diameters and lengths available on request

J 1-5 PP AIR HOSE



Applications:

- ventilation for various kinds of equipment
- spring steel wire integrated in wall
- heavily corrugated and capable of axial compression into fixed position

Material:

- wall: PP
- spiral: spring steel wire

Standard Color:

- ivory and black



Properties:

- good resistance to alkalis and acids
- good resistance to chemicals
- good resistance to UV and ozone

Temperature Range:

- -20 °C approx. to +80 °C approx.

Specification:

- ø 25 to ø 254 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
25	32	0.700	0.250	35	0.10	5	1-5-025-000
32	38	0.650	0.220	42	0.13	5	1-5-032-000
38	46	0.580	0.190	50	0.15	5	1-5-038-000
51	59	0.430	0.160	64	0.19	5	1-5-051-000
63	73	0.350	0.120	80	0.24	5	1-5-063-000
76	85	0.300	0.100	93	0.30	5	1-5-076-000
90	100	0.250	0.070	110	0.36	5	1-5-090-000
102	112	0.230	0.060	120	0.40	5	1-5-102-000
127	137	0.180	0.040	148	0.52	5	1-5-127-000
152	162	0.160	0.036	176	0.80	5	1-5-152-000
203	213	0.120	0.028	230	1.10	5	1-5-203-000
254	264	0.090	0.011	286	1.56	5	1-5-254-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 5-1 TPE FLEX HOSE



Applications:

- for powdery solids such as dust, powder and fibre
- for gaseous media such as vapor and smoke
- for steam extraction
- as conductor of hot and cold air
- for blowers and compressors

Construction:

- spiral: spring steel wire integrated in wall

Material:

- wall: thermo-plastic rubber (TPE)

- spiral: spring steel wire

Standard Color:

- black



Properties:

- excellent price to performance ratio (patented process, low cost and robust to transport, minimal storage space)

- good resistance to alkalis, acids and chemicals
- small bending radius

- capable of electrostatic discharge by grounding the spiral

Temperature Range:

- -40 °C approx. to +100 °C approx.

- short time to +125 °C approx.

Specification:

- ø 25 to ø 305 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
25	32	0.350	0.170	32	0.12	15	5-1-025-000
32	39	0.300	0.160	39	0.14	15	5-1-032-000
38	45	0.300	0.160	45	0.16	15	5-1-038-000
51	59	0.270	0.130	59	0.23	15	5-1-051-000
60	68	0.230	0.110	68	0.27	15	5-1-060-000
63	71	0.210	0.090	71	0.28	15	5-1-063-000
76	84	0.180	0.070	84	0.33	15	5-1-076-000
80	88	0.170	0.065	88	0.36	15	5-1-080-000
90	98	0.150	0.055	98	0.44	15	5-1-090-000
102	110	0.140	0.045	108	0.55	15	5-1-102-000
114	122	0.115	0.040	122	0.58	15	5-1-114-000
120	128	0.110	0.040	128	0.61	15	5-1-120-000
127	135	0.105	0.030	133	0.66	15	5-1-127-000
140	148	0.095	0.030	148	0.73	15	5-1-140-000
152	160	0.090	0.030	160	0.79	15	5-1-152-000
160	168	0.085	0.025	168	0.83	15	5-1-160-000
178	186	0.075	0.020	186	0.94	15	5-1-178-000
203	211	0.060	0.020	211	1.10	15	5-1-203-000
254	262	0.040	0.015	262	1.30	10	5-1-254-000
305	313	0.010	0.010	313	1.80	10	5-1-305-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 3-3 PVC RIGID BEND DUCTING HOSE



Applications:

- for air, fume extraction and liquid supply under low pressure
- for conveyance of powder, granules and dust extraction
- for wood dust extraction
- portable air conditioner venting hose

Construction:

- interlocking rigid PVC profile by rigid PVC

Material:

- rigid PVC

Standard Color:

- grey and black



Properties:

- self-supporting
- simple increase or reduction of size
- jointing of lengths
- good resistance to acids, alkalis, and chemicals
- maintain shape
- flame-retardant according to UL94-HB

Temperature Range:

- -10 °C approx. to +60 °C approx.

Specification:

- ø 51 to ø 200 mm

I.D. mm	O.D. mm	Stock Lengths m	Order No.
51	57	5	3-3-051-000
65	71	5	3-3-065-000
75	82	5	3-3-075-000
90	97	5	3-3-090-000
100	107	5	3-3-100-000
125	133	5	3-3-125-000
150	158	5	3-3-150-000
200	208	5	3-3-200-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 3-2 EVA HOSE



Applications:

- for domestic and industrial vacuum cleaners
- for cleaning of swimming pools

Construction:

- self-supporting profile construction
- open profile geometry

Material:

- wall: EVA

Standard Color:

- black



Properties:

- good resistance to alkalis and acids
- good resistance to UV and ozone
- gas and liquid tight
- crush-proof

Temperature Range:

- -45 °C approx. to +65 °C approx.

Specification:

- ø 25 to ø 50 mm

I.D. mm	O.D. mm	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
25	32	0.500	66	0.15	20	3-2-025-000
32	39.5	0.500	82	0.24	20	3-2-032-000
38	47	0.500	93	0.31	20	3-2-038-000
50	60.8	0.500	121	0.44	20	3-2-050-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request

J 1-9 PVC FIBRE GLASS HOSE



Applications:

- for welding fume, gas, vapor and dust
- for explosive environment

Construction:

- spring steel wire integrated in wall
- fibre glass reinforced wall
- wall thickness 0.35 mm approx.

Material:

- wall: PVC + fibre glass
- spiral: spring steel wire

Standard color:

- dark grey



Properties:

- highly flexible and compressible 4:1
- good resistance of flame and heat
- good resistance to alkalis and acids
- good resistance to chemicals
- good resistance to UV and ozone
- capable of electrostatic discharge by grounding the spiral
- flame-retardant according to UL94-V0

Temperature Range:

- -20 °C approx. to +100 °C approx.
- short time to +120 °C approx.

Specification:

- ø 51 to ø 406 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
51	60	0.240	0.150	60	0.18	6	1-9-051-000
63	72	0.200	0.120	72	0.20	6	1-9-063-000
76	85	0.160	0.080	85	0.23	6	1-9-076-000
80	89	0.150	0.070	89	0.25	6	1-9-080-000
90	99	0.140	0.060	99	0.29	6	1-9-090-000
102	111	0.120	0.050	111	0.32	6	1-9-102-000
114	123	0.110	0.045	123	0.38	6	1-9-114-000
127	136	0.100	0.035	136	0.42	6	1-9-127-000
140	149	0.090	0.033	149	0.45	6	1-9-140-000
152	161	0.080	0.032	161	0.55	6	1-9-152-000
160	169	0.075	0.025	169	0.65	6	1-9-160-000
178	187	0.070	0.020	187	0.75	6	1-9-178-000
203	212	0.060	0.020	212	0.86	6	1-9-203-000
254	263	0.050	0.010	263	1.20	6	1-9-254-000
305	314	0.040	0.006	314	1.30	6	1-9-305-000
355	364	0.035	0.006	364	1.70	6	1-9-355-000
406	415	0.030	0.006	415	2.70	6	1-9-406-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 3-6 PVC FLEX SUPERELASTIC HOSE



Applications:

- Suction and blast hose, especially suitable:
- for solids such as dust, powder and fibre
- for gaseous and liquid media
- for domestic and industrial vacuum cleaners, building drying and welding gas extraction

Construction:

- wall: soft PVC with fibre reinforcement
- spiral: plastic coated spring steel wire

Material:

- PVC coated fibre
- spring steel wire

Standard color:

- black



Properties:

- good resistance to alkalis and acids
- good resistance to UV and ozone
- small bending radius
- capable of electrostatic discharge (according to BGR 132, formerly ZH 1/200) by grounding the spiral

Temperature Range:

- 0 °C approx. to + 85 °C approx.

Specification:

- ø 32 to ø 102 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
32	38	1.500	0.200	32	0.28	15	3-6-032-000
38	44	1.400	0.200	38	0.34	15	3-6-038-000
41	47	1.400	0.180	41	0.37	15	3-6-041-000
44	50	1.300	0.160	44	0.38	15	3-6-044-000
51	57	1.300	0.150	51	0.46	15	3-6-051-000
63	69	1.000	0.140	62	0.53	15	3-6-063-000
76	82	0.800	0.100	76	0.68	10	3-6-076-000
80	86	0.700	0.090	80	0.83	10	3-6-080-000 ★
89	95	0.700	0.090	89	0.93	10	3-6-089-000 ★
102	108	0.600	0.080	102	1.00	10	3-6-102-000 ★

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

★ MOQ: 600M

FOOD AND PHARMACEUTICAL INDUSTRY



J2-1 PU HOSE



Applications:

- for abrasive solids such as dust, powder, fibre, chip and granules
- for gaseous and liquid media
- for de-dusting and suction plant, industrial vacuum cleaners, suction of paper and textile fibre as resistant protection hose

Construction:

- hard plastic spiral integrated in wall

Material:

- wall: Ether-polyurethane
- spiral: hard PVC

Standard Color:

- transparent



Properties:

- light model
- abrasion-proof
- smooth interior
- good flexibility and durability
- good resistance to alkalis, acids and chemicals
- good resistance to UV and ozone
- small bending radius
- gas and liquid tight
- flame-retardant according to UL94-HB

Temperature Range:

- -20 °C approx. to +70 °C approx.
- short time to +80 °C approx.

Specification:

- ø 25 to ø 152 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
25	31	1.000	0.250	31	0.15	20	2-1-025-000
32	38	0.850	0.200	38	0.19	20	2-1-032-000
38	44	0.750	0.200	50	0.24	20	2-1-038-000
40	46	0.750	0.200	60	0.26	20	2-1-040-000
45	51	0.650	0.200	65	0.30	20	2-1-045-000
51	58	0.500	0.200	70	0.35	20	2-1-051-000
60	68	0.500	0.160	80	0.49	20	2-1-060-000
63	71	0.450	0.160	80	0.54	20	2-1-063-000
76	84	0.400	0.160	100	0.64	20	2-1-076-000
80	89	0.350	0.140	110	0.68	20	2-1-080-000
90	99	0.300	0.140	125	0.79	20	2-1-090-000
102	112	0.280	0.140	150	0.87	20	2-1-102-000
127	138	0.250	0.110	170	1.26	20	2-1-127-000
152	164	0.180	0.090	200	1.61	20	2-1-152-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request



J8-2 PU M MHF FLEX HOSE J 8-1 PU L MHF FLEX HOSE 0.4 mm approx.



Applications:

- suitable for moist workplace
- for abrasive solids such as dust, powder, fibre and chip
- for extraction arms and dust collection equipments
- for CNC machine

Construction:

- spring steel wire integrated in wall
- wall thickness 0.6 mm approx.

Material:

- wall: ether-polyurethane
- spiral: spring steel wire

Standard Color:

- transparent

Properties:

- microbe and hydrolysis resistant
- food quality complied with FDA
- efficient flow characteristics
- maximum flexibility and abrasion resistance
- good resistance to UV and ozone
- small bending radius
- gas and liquid tight
- excellent compressibility 3:1
- capable of electrostatic discharge by grounding the spiral

Temperature Range:

- -40 °C approx. to +90 °C approx.
- short time to +125 °C approx.

Specification:

- ø 25 to ø 305 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
25	32	1.300	0.340	32	0.17	20	8-2-025-000
32	39	1.100	0.320	39	0.20	20	8-2-032-000
38	46	0.900	0.300	46	0.23	20	8-2-038-000
51	59	0.700	0.240	59	0.32	15	8-2-051-000
60	68	0.650	0.210	68	0.39	15	8-2-060-000
63	71	0.550	0.180	71	0.40	15	8-2-063-000
76	84	0.470	0.130	84	0.53	15	8-2-076-000
80	88	0.430	0.120	88	0.56	15	8-2-080-000
90	98	0.390	0.100	98	0.59	15	8-2-090-000
102	110	0.350	0.080	110	0.62	15	8-2-102-000
114	122	0.300	0.070	122	0.70	15	8-2-114-000
120	128	0.290	0.070	128	0.74	15	8-2-120-000
127	135	0.280	0.060	135	0.77	15	8-2-127-000
140	148	0.250	0.050	148	0.86	15	8-2-140-000
152	160	0.170	0.050	160	0.91	15	8-2-152-000
160	168	0.160	0.040	168	0.97	15	8-2-160-000
178	186	0.140	0.040	186	1.07	15	8-2-178-000
203	211	0.130	0.030	211	1.32	15	8-2-203-000
254	262	0.100	0.015	262	1.56	10	8-2-254-000
305	313	0.090	0.010	313	2.04	10	8-2-305-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 2-7 PU L SUCTION HOSE

**Applications:**

- for abrasive solids such as dust, powder, fibre, chip, and granules
- for de-dusting and suction plant, industrial vacuum cleaners, suction of paper and textile fibre

Construction:

- spring steel wire integrated in wall
- wall thickness 0.9mm approx.

Material:

- wall: special premium ether-polyurethane
- spiral: spring steel wire

Standard Color:

- transparent

**Properties:**

- highly abrasion-proof
- smooth interior
- high tensile strength and tear resistant
- microbe and hydrolysis resistant
- good resistance to chemicals
- good resistance to UV and ozone
- small bending radius
- gas and liquid tight
- capable of electrostatic discharge by grounding the spiral
- electrical and surface resistance $\leq 10^{10} \Omega$

Temperature Range:

- -40°C approx. to +90°C approx.
- short time to +125°C approx.

Specification:

- \varnothing 32 to \varnothing 254 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Weight kg/m	Stock Lengths m	Order No.
32	39	2.120	0.460	0.28	15	2-7-032-000
38	45	1.795	0.430	0.32	15	2-7-038-000
51	58	1.370	0.365	0.41	15	2-7-051-000
60	67	1.150	0.285	0.49	15	2-7-060-000
63	70	1.050	0.205	0.52	15	2-7-063-000
76	84	0.920	0.195	0.63	15	2-7-076-000
90	98	0.770	0.155	0.75	15	2-7-090-000
102	110	0.685	0.115	0.97	15	2-7-102-000
114	122	0.605	0.105	1.11	15	2-7-114-000
120	128	0.580	0.105	1.16	15	2-7-120-000
127	135	0.560	0.085	1.22	15	2-7-127-000
140	148	0.495	0.085	1.34	15	2-7-140-000
152	160	0.460	0.075	1.52	15	2-7-152-000
178	186	0.385	0.055	1.81	15	2-7-178-000
203	211	0.350	0.050	2.00	15	2-7-203-000
254	262	0.280	0.020	2.39	10	2-7-254-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 4-4 SILICONE FOOD HOSE

**Applications:**

- ideal for product transfer in pharmaceutical, cosmetic, biotech and food industry
- suitable for cleaning and disinfecting

Construction:

- stainless steel spiral integrated in wall
- wall thickness 3.5 mm approx

Material:

- wall: silicone + fibre
- spiral: stainless steel wire

Standard Color:

- transparent exterior; white interior

**Properties:**

- robust
- smooth interior and corrugated exterior
- food grade
- good flow characteristics
- food quality complied with FDA

Temperature Range:

- -40°C approx. to +200°C approx.
- short time to +280 °C approx.

Specification:

- \varnothing 38 to \varnothing 152 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Stock Lengths m	Order No.
38	46	4.300	1.107	4	4-4-038-000
40	48	4.300	1.100	4	4-4-040-000
45	63	4.100	0.900	4	4-4-045-000
51	59	4.000	0.811	4	4-4-051-000
63	71	3.700	0.717	4	4-4-063-000
76	84	3.400	0.700	4	4-4-076-000
80	88	3.300	0.670	4	4-4-080-000
83	91	3.300	0.670	4	4-4-083-000
89	97	3.200	0.650	4	4-4-089-000
102	110	3.100	0.620	4	4-4-102-000
114	122	2.700	0.570	4	4-4-114-000
120	128	2.900	0.546	4	4-4-120-000
127	135	2.900	0.400	4	4-4-127-000
152	160	2.800	0.358	4	4-4-152-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 2-4 PVC HOSE

**Applications:**

- widely applicable to discharge and suction of fluid, gas, oil, and dust in agricultural pump, oil warehouse, petrochemical equipment, engineering, mine and food industry

Construction:

- spring steel wire spiral embedded in wall
- wall: smooth interior and exterior

Material:

- wall: soft PVC
- spiral: spring steel wire

Standard Color:

- transparent

**Properties:**

- high visibility of the fluid conveyance and easy in control of flow rate
- very high pressure, vacuum and compression resistance
- good resistant to UV, ozone and chemical
- crystal clear and smooth
- flame-retardant according to UL94-HB
- food quality complied with FDA

Temperature Range:

- -20 °C approx. to +70 °C approx.
- short time to +80 °C approx.

Specification:

- \varnothing 9 to \varnothing 63 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
9	15	7.000	0.850	17	0.15	100	2-4-009-000
12	18	6.000	0.850	23	0.18	100	2-4-012-000
15	23	6.000	0.850	30	0.25	100	2-4-015-000
19	25	5.000	0.850	32	0.32	100	2-4-019-000
25	32	5.000	0.850	42	0.50	50	2-4-025-000
32	41	4.000	0.850	64	0.65	50	2-4-032-000
38	48	4.000	0.850	76	0.80	40	2-4-038-000
45	55	4.000	0.800	89	1.10	40	2-4-045-000
51	61	4.000	0.800	100	1.24	40	2-4-051-000
60	72	3.600	0.800	170	1.70	20	2-4-060-000
63	75	3.600	0.800	170	1.80	20	2-4-063-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request

J 3-5 PE FOOD HOSE

**Applications:**

- suction and transport hose for food and pharmaceutical industries
- for chemical industry
- available for water, acetic acid, soy sauce, oil, ethanol (20%), etc.
- for gaseous and liquid media
- for solids such as dust, powder, fibre, chip and granules
- for vacuum cleaners, conveying systems, blowers and compressors

Construction:

- wall: special polyethylene (PE)
- wall thickness 0.8 mm approx.
- spiral: hard plastic

**Properties:**

- smooth interior
- food grade wall
- optimized flow properties
- good resistance to alkalis and acids
- extremely good resistance to chemicals
- odorless and tasteless
- food quality complied with FDA
- Testing as per Commission Regulation

Temperature Range:

- -20 °C approx. to +60 °C approx.

Specification:

- \varnothing 32 to \varnothing 76 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
32	39	0.600	0.200	32	0.27	20	3-5-032-000
38	45	0.600	0.200	38	0.30	20	3-5-038-000
51	58	0.500	0.200	51	0.43	20	3-5-051-000
63	70	0.400	0.160	63	0.54	20	3-5-063-000
76	85	0.400	0.160	76	0.58	20	3-5-076-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request

J 7-1 PVC BRAIDED HOSE



Applications:

- pressure hose, for compressed air
- for gaseous and liquid media
- for conveying gas and liquid in food and pharmaceutical industry

Construction:

- fabric reinforced wall
- smooth interior and exterior wall

Material:

- wall: soft PVC



Properties:

- cadmium free
- food quality complied with FDA
- good resistance to alkalis, acids, UV, ozone and chemicals
- small bending radius
- gas and liquid tight

Temperature Range:

- -10 °C approx. to +60 °C approx.

Specification:

- ø 6 to ø 38 mm

I.D. mm	O.D. mm	Working Pressure kgf/cm ²	Stock Lengths m	Order No.
8	13.5	10	100	7-1-002-000
9	15	10	100	7-1-003-000
12	18	8	100	7-1-004-000
15	22	8	100	7-1-005-000
19	26	6	50	7-1-006-000
25	33	6	50	7-1-007-000
32	40	5	50	7-1-008-000
38	47	5	50	7-1-009-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 7-10 SILICONE BRAIDED HOSE



Applications:

- pharmaceuticals
- food & beverages
- biotechnology
- cosmetics
- conveys liquids under pressure at high or low operating temperatures
- pneumatic application in sterile area

Construction:

- fabric reinforced wall
- smooth interior and exterior wall

Material:

- silicone

Standard Color:

- transparent



Properties:

- good stability
- anti-adhesive
- stress resistance
- high working pressure under high temperature
- good resistance to mineral oil, chemicals, UV and ozone
- odorless and tasteless
- food quality complied with FDA

Temperature Range:

- -40 °C approx. to +200 °C approx.

Specification:

- ø 5 to ø 25 mm

I.D. mm	O.D. mm	Working Pressure kgf/cm ²	Stock Lengths m	Order No.
5	12	7	50	7-10-001-000
6.5	13.5	7	50	7-10-002-000
8	15	7	50	7-10-003-000
9.5	16.6	7	50	7-10-004-000
12.7(1/2")	20	6	50	7-10-005-000
16	24	6	50	7-10-006-000
19	27	6	25	7-10-007-000
25	33	5	30	7-10-009-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request



ABRASION RESISTANT SUCTION HOSES

3



Pressure Resistant Central Feeding System Machinery And Equipment Construction Vehicles



J 2-5 PVC GRIT HOSE

**Applications:**

- shipyards and ships
- suction and discharge for sand, grains, gravel, cement and iron
- transfer of various powder and granules

Construction:

- wall: soft compound abrasion PVC + rubber
- spiral: hard PVC

Material:

- soft compound abrasion PVC and rigid PVC helix

**Properties:**

- highly abrasion-proof
- pressure resistant
- very robust
- flame-retardant according to UL94-HB

Temperature Range:

- -10 °C approx. to +60 °C approx.

Specification:

- ø 38 to ø 152 mm

I.D. mm	O.D. mm	Overpressure bar	Stock Lengths m	Order No.
38	52	1.5	20	2-5-038-000
51	62	1.2	20	2-5-051-000
63	75	1.2	20	2-5-063-000
76	89	1.2	20	2-5-076-000
102	118	1.2	20	2-5-102-000
127	144	1.2	20	2-5-127-000
152	173	1.2	20	2-5-152-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J2-3 PU HOSE WITH ELECTRIC WIRE

**Applications:**

- for suction and transportation for abrasive solids such as dust, powder, fibers, chip and granulates
- for gaseous and liquid media
- for industrial vacuum cleaner, suction of paper and printing machines, blowers and compressors as robust protection hose

Construction:

- spring steel wire integrated in wall

Material:

- wall: special premium ether-polyurethane
- spiral: hard PVC

**Properties:**

- light model
- smooth interior
- abrasion proof
- good resistance to alkalis, acids, chemicals, uv and ozone
- capable of electrostatic discharge by grounding the spiral

Temperature Range:

- -20 °C approx. to +60 °C approx.

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
38	45	0.750	0.200	31	0.200	20	2-3-038-000
40	47	0.750	0.200	40	0.210	20	2-3-040-000
51	58	0.500	0.200	45	0.290	20	2-3-051-000
60	68	0.500	0.200	50	0.430	20	2-3-060-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 2-2 PU SUCTION HOSE-CU

**Applications:**

- for central feeding and vacuum industrial deducting in the plastics industry
- for suction and transportation for abrasive solids, such as wood chip, granules, oil and fuel
- for gaseous and liquid media
- for industrial vacuum cleaners, granulate conveying systems, printing machines, blowers and compressors as robust protection hose

Construction:

- spring steel wire integrated in wall
- Wall thickness 3.2mm approx.

Material:

- wall: interior PU, exterior soft PVC
- spiral: rigid PVC

**Properties:**

- heavy model
- smooth interior
- increase pressure and vacuum resistance
- high axial strength
- good resistance to chemicals
- capable of electrostatic discharge by grounding the spiral

Temperature Range:

- -20 °C approx. to +70 °C approx.
- short time to +80 °C approx.

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
38	46	5.000	0.700	182	0.59	30	2-2-038-000
40	48	5.000	0.700	195	0.62	30	2-2-040-000
51	60	5.000	0.700	235	0.88	30	2-2-051-000
60	69	5.000	0.700	275	1.13	30	2-2-060-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J2-13 SUPERFLEX GRIT HOSE

**Applications:**

- construction vehicle
- waste management
- agriculture: suction and transport of liquids

Material:

- wall: compound material (PVC + rubber)
- spiral: Hard PVC

Standard Color:

- black with grey spiral

Properties:

- smooth interior
- high flexibility at extreme low temperatures
- highly abrasion-proof
- pressure resistant
- very robust
- easy dragging on the ground

Temperature Range:

- -40 °C approx. to +50 °C approx.

Specification:

- ø 51 to ø 102 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths M	Order No.
51	60	3.3	7	160	0.97	20	2-13-051-000
63	74	3	7	210	1.38	20	2-13-063-000
76	88	3	7	250	1.67	20	2-13-076-000
102	116	2.2	6	335	2.77	20	2-13-102-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 3-1 PVC HOSE

**Applications:**

- indoor ventilation, air conditioning
- suction of metal sludge from metal processing machines
- air suction in dust collectors, factories, mines etc.
- transportation of powder, gas, liquid and granules
- dust suction for furniture and wood processing

Construction:

- wall made by soft PVC and spiral made by hard PVC helix

Material:

- wall: soft PVC
- spiral: hard PVC

**Standard Color:**

- grey

Properties:

- outer surface is corrugated, inner surface is smooth
- good resistance to chemicals
- flame-retardant according to UL94-HB

Temperature Range:

- -10 °C approx. to +60 °C approx.

Specification:

- ø 32 to ø 152 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
32	39	0.600	0.200	32	0.27	20	3-1-032-000
38	45	0.600	0.200	38	0.30	20	3-1-038-000
51	59	0.500	0.200	51	0.43	20	3-1-051-000
63	71	0.400	0.160	63	0.54	20	3-1-063-000
76	84	0.400	0.160	76	0.58	20	3-1-076-000
102	111	0.300	0.140	102	0.88	20	3-1-102-000
127	137	0.200	0.110	127	1.10	20	3-1-127-000
152	166	0.200	0.090	152	1.70	20	3-1-152-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 2-6 PVC BRAIDED SUCTION HOSE

**Applications:**

- for conveying water and solids such as dust, powder, fibre and granules
- for high pressure engineering vehicles

Construction:

- wall: PVC + yarn
- spiral: hard PVC

Properties:

- smooth interior, fabric reinforced, and can afford high pressure
- food quality complied with FDA

**Temperature Range:**

- -10 °C approx. to +60 °C approx.

Specification:

- ø 25 to ø 203 mm

I.D. mm	O.D. mm	Pressure (MPa)		Weight kg/m	Stock Lengths m	Order No.
		Positive Pressure	Negative Pressure			
25	34	0.50	0.10	0.38	20	2-6-025-000
32	42	0.50	0.10	0.46	20	2-6-032-000
38	49	0.50	0.10	0.58	20	2-6-038-000
51	65	0.50	0.10	0.95	20	2-6-051-000
64	80	0.50	0.10	1.40	20	2-6-064-000
76	93	0.50	0.10	1.80	20	2-6-076-000
101	119	0.50	0.10	2.45	20	2-6-101-000
126	152	0.50	0.10	4.10	20	2-6-126-000
152	184	0.50	0.10	5.80	20	2-6-152-000
203	238	0.35	0.10	8.60	20	2-6-203-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 2-8 PU H SUCTION HOSE

**Applications:**

- for high flow-rates of hot and abrasive solids such as powder, chip and granules
- for industrial vacuum cleaners, granule conveying systems, printing machines, blowers and compressors
- as robust protection hose

Construction:

- spring steel wire integrated in wall
- wall thickness 1.5mm approx.

Material:

- wall: special premium ester-polyurethane
- spiral: spring steel wire

Standard Color:

- transparent

**Properties:**

- highly abrasion-proof
- smooth interior
- increased pressure and vacuum resistance
- high tensile strength and tear resistant
- good resistance to chemicals
- small bending radius
- gas and liquid tight
- capable of electrostatic discharge by grounding the spiral
- electrical and surface resistance $\leq 10^{10} \Omega$

Temperature Range:

- -40°C approx. to +90°C approx.
- short time to +125°C approx.

Specification:

- ø 32 to ø 203 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Stock Lengths m	Weight kg/m	Order No.
32	40	3.095	0.875	15	0.44	2-8-032-000
38	46	2.925	0.865	15	0.52	2-8-038-000
51	59	2.330	0.835	15	0.66	2-8-051-000
60	68	1.955	0.730	15	0.78	2-8-060-000
63	71	1.815	0.675	15	0.84	2-8-063-000
76	85	1.575	0.555	15	1.05	2-8-076-000
90	99	1.300	0.425	15	1.25	2-8-090-000
102	111	1.190	0.355	15	1.49	2-8-102-000
114	123	1.090	0.335	15	1.68	2-8-114-000
120	129	1.050	0.315	15	1.77	2-8-120-000
127	136	0.960	0.265	15	1.84	2-8-127-000
140	149	0.900	0.240	15	2.03	2-8-140-000
152	161	0.800	0.180	15	2.41	2-8-152-000
178	187	0.705	0.150	15	2.87	2-8-178-000
203	212	0.600	0.120	15	3.12	2-8-203-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J20-10 PVC S-AGRO SUCTION HOSE

**Applications:**

- for conveyance of powders, slurry and water in agriculture
- for conveying water in high pressure
- for seeder, slurry, irrigation for farmland
- for engineering vehicles and pumps

Construction:

- Wall thickness: 3.5mm
- wall: soft PVC
- spiral: hard PVC

**Properties:**

- high visibility of the fluid conveyance and easy in control of flow rate
- smooth interior
- abrasion resistance

Temperature Range:

- -10 °C ~+60 °C

I.D. mm	O.D. mm	Pressure (MPa)		Bending Radius mm	KG/ M	Stock Lengths m	Order No.
		Positive pressure	Negative pressure				
25	31	0.40	-0.10	150	0.30	20	20-10-025-000
32	37	0.35	-0.10	210	0.39	20	20-10-032-000
38	44	0.30	-0.10	270	0.48	20	20-10-038-000
51	58	0.30	-0.10	360	0.80	20	20-10-051-000
63	72	0.30	-0.10	500	1.16	20	20-10-063-000
76	86	0.30	-0.10	600	1.66	20	20-10-076-000
102	112	0.25	-0.10	900	2.36	20	20-10-102-000

J 3-7 PU L SWEEPER HOSE

J 3-8 PU M SWEEPER HOSE 1.5 mm approx.



Applications:

- for sweeper machine, sweeper

Construction:

- wall thickness 1mm approx.

Material:

- wall: polyurethane
- spiral: spring steel wire



Properties:

- flexible and compressible
- highly abrasion resistance
- exterior folds
- good resistance to oil, gasoline and chemical

Temperature Range:

- -40°C approx. to +90°C approx.

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Stock Lengths m	Order No.
150	159	0.46	0.07	100	10	3-7-150-000
178	189	0.38	0.05	118	10	3-7-178-000
203	211	0.35	0.05	130	10	3-7-203-000
254	263	0.28	0.02	160	10	3-7-254-000

Delivery Variants: customer-specific product marking, diameters and lengths available on request

J 2-12 PVC SUCTION HOSE



Applications:


- for plastic industry
- for abrasive solids such as dust, powder, fibre, chip and granules
- for gaseous and liquid media
- for de-dusting and suction plant, industrial vacuum cleaners, suction of paper and textile fibre as resistant protection hose

Material:

- wall: PVC
- spiral: hard PVC

Standard Color:

- transparent



Properties:

- abrasion-proof
- smooth interior
- increased pressure and vacuum resistance
- high tensile strength and tear resistant
- good resistance to chemicals
- gas and liquid tight
- flame-retardant, anti-adhesive

Temperature Range:

- -10°C approx. to +60°C approx.
- short time to +80°C approx

Specification:

- ø 32 to ø 150 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Stock Lengths m	Order No.
32	40	2.000	1.000	120	20	2-12-032-001
38	47	2.000	1.000	140	20	2-12-038-001
51	61	2.000	1.000	180	20	2-12-051-001
63	73	2.000	1.000	225	20	2-12-063-001
76	90	2.000	1.000	265	20	2-12-076-001
90	105	2.000	0.700	315	20	2-12-090-001
102	120	2.000	0.700	350	20	2-12-102-001
127	154	2.000	0.700	445	20	2-12-127-001
152	182	2.000	0.700	540	20	2-12-152-001

Delivery Variants: customer-specific product marking, diameters and lengths available on request



ANTISTATIC AND ELECTRICALLY CONDUCTIVE HOSES

Electronics
Chemical Industry
Explosion Proof
Organic Gases

J 9-7 EVA EL HOSE



Applications:

- for domestic and industrial vacuum cleaners
- for cleaning of swimming pools

Construction:

- self-supporting profile construction
- open profile geometry

Material:

- wall: EVA EL

Standard Color:

- black



Properties:

- good resistance to alkalis and acids
- good resistance to UV and ozone
- gas and liquid tight
- crush-proof
- static conductive model is available on request
- electrical and surface resistance $\leq 10^6 \Omega$

Temperature Range:

- -45 °C approx. to +65 °C approx.

Specification:

- \varnothing 25 to \varnothing 50 mm

I.D. mm	O.D. mm	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
25	32	0.500	66	0.15	15	9-7-025-000
32	39.5	0.500	82	0.24	15	9-7-032-000
38	47	0.500	93	0.31	15	9-7-038-000
50	60.8	0.500	121	0.44	15	9-7-050-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request

J 9-6 EPDM EL HOSE



Applications:

- for area easy to burst mixtures such as dust, powder, fibre, chip and particles
- for gas and liquid environments, vacuum cleaners, conveying systems and compressors
- for the electronics, chemical and other industries
- metal grinding machines for dust collection.

Material:

- Wall: EPDM+PP
- spiral: PP



Properties:

- conductive rubber material can be antistatic
- good resistance to sparking
- good resistance to alkalis and acids
- highly abrasion-proof
- smooth interior
- flame-retardant according to UL94-V2
- electrical and surface resistance $\leq 10^6 \Omega$

Temperature Range:

- -30° C approx. to +80° C approx.

Specification:

- \varnothing 25 to \varnothing 102 mm

I.D. mm	O.D. mm	Pressure (MPa)		Weight kg/m	Stock Lengths m	Order No.
		Positive Pressure	Negative Pressure			
25	33	0.15	0.07	0.30	20	9-6-025-000
32	39	0.10	0.07	0.32	20	9-6-032-000
38	47	0.08	0.07	0.43	20	9-6-038-000
51	60	0.08	0.06	0.52	20	9-6-051-000
64	71	0.07	0.05	0.71	20	9-6-064-000
76	86	0.06	0.04	0.83	20	9-6-076-000
90	100	0.05	0.03	0.99	20	9-6-090-000
102	112	0.05	0.02	1.13	20	9-6-102-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request

J 9-1 PVC AS FLEX HOSE



Applications:

- for transporting inflammable bulk materials and in areas liable to contain explosive mixtures (explosion protection)
- for powdery solids such as dust, powder and fibre
- for gaseous media such as vapor and smoke
- for air conditioning and ventilation technology

Construction:

- spring steel wire integrated in wall

Material:

- wall: antistatic PVC
- spiral: zinc-coated spring steel wire

Standard Color:

- beige:transparent



Properties:

- optimized flow properties
- good resistance to alkalis and acids
- good resistance to chemicals
- capable of electrostatic discharge by grounding the spiral
- compressible 3:1
- flame-retardant according to UL94-HB
- electrical and surface resistance $\leq 10^9 \Omega$

Temperature Range:

- -10 °C approx. to +70 °C approx.
- short time to +80 °C approx.

Specification:

- \varnothing 38 to \varnothing 203 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
38	46	0.500	0.180	46	0.26	15	9-1-038-000
51	59	0.400	0.150	59	0.30	15	9-1-051-000
63	71	0.300	0.100	71	0.33	15	9-1-063-000
76	84	0.270	0.080	84	0.40	15	9-1-076-000
102	110	0.200	0.050	110	0.57	15	9-1-102-000
127	135	0.160	0.030	135	0.77	15	9-1-127-000
152	160	0.140	0.030	160	0.90	15	9-1-152-000
178	186	0.120	0.030	186	1.15	15	9-1-178-000
203	211	0.100	0.025	211	1.30	15	9-1-203-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 9-5 TPV EL AIR HOSE



Applications:

- suction and blast hose, especially suitable: in areas liable to contain explosive mixtures (explosion protection)
- for welding gas extraction
- for air conditioning and ventilation of fumes, light duty dust extraction and air movement

Construction:

- spring steel wire integrated in wall
- fabric-reinforced wall
- wall thickness 0.5mm approx.

Material:

- wall: TPV EL coated fabric
- spiral: spring steel wire



Standard color:

- black

Properties:

- excellent compressibility 4:1
- good resistance to alkalis, acids, chemicals, UV and ozone
- flame-retardant according to UL94-HB
- electrical and surface resistance $\leq 10^6 \Omega$

Temperature Range:

- -20 °C approx. to +150 °C approx.

Specification:

- \varnothing 51 to \varnothing 406 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Stock Lengths m	Order No.
51	61	0.240	0.145	10	9-5-051-000
63	73	0.195	0.115	10	9-5-063-000
76	86	0.160	0.080	10	9-5-076-000
102	112	0.120	0.050	10	9-5-102-000
127	137	0.100	0.035	10	9-5-127-000
152	162	0.080	0.035	10	9-5-152-000
178	188	0.070	0.020	10	9-5-178-000
203	213	0.060	0.020	10	9-5-203-000
254	264	0.050	0.010	10	9-5-254-000
305	315	0.040	0.005	10	9-5-305-000
356	366	0.035	0.005	10	9-5-356-000
406	416	0.030	0.003	10	9-5-406-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 9-8 PE EL HOSE New Developed Soft Material ⚡ EL



- Applications:**
- Suction and blast hose, especially suitable:
 - in areas liable to contain explosive mixtures (explosion protection)
 - for aggressive solids such as dust, powder, fibres and aggressive gaseous media such as vapors and smoke
 - for de-dusting, suction plants and chemical industry
- Material:**
- wall: newly improved softer EL PE material
 - spiral: spring steel wire
- Properties:**
- electrical and surface resistance $\leq 10^8 \Omega$
 - anti-stick
 - highly flexible and compressible
 - good resistance to mineral oils, alkalis, and acids
 - extremely good resistance to chemicals
 - capable of electro-static discharge
- Temperature Range:**
- 35°C approx. to +80°C approx.
- Specification:**
- \varnothing 51 to \varnothing 160 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Stock Lengths m	Order No.
51	59	0.369	0.240	59	10	9-8-051-000
60	68	0.305	0.190	68	10	9-8-060-000
63	71	0.285	0.170	73	10	9-8-063-000
76	84	0.250	0.130	83	10	9-8-076-000
90	98	0.200	0.100	98	10	9-8-090-000
102	110	0.185	0.080	108	10	9-8-102-000
110	118	0.170	0.075	118	10	9-8-110-000
115	123	0.160	0.070	123	10	9-8-115-000
120	128	0.155	0.070	128	10	9-8-120-000
127	135	0.150	0.055	133	10	9-8-127-000
140	148	0.135	0.050	148	10	9-8-140-000
152	160	0.125	0.050	158	10	9-8-152-000
160	168	0.115	0.045	168	10	9-8-160-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request



HIGH TEMPERATURE EXHAUST EXTRACTION HOSES

5


J2-12 PVC AS SUCTION HOSE



- Applications:**
- for plastic industry
 - for abrasive solids such as dust, powder, fibre, chip and granules
 - for gaseous and liquid media
 - for de-dusting and suction plant, industrial vacuum cleaners, suction of paper and textile fibre as resistant protection hose
- Material:**
- wall: antistatic PVC
 - spiral: antistatic hard PVC
- Properties:**
- abrasion-proof
 - smooth interior
 - increased pressure and vacuum resistance
 - high tensile strength and tear resistant
 - good resistance to chemicals
 - gas and liquid tight
 - flame-retardant, anti-adhesive
 - electrical and surface resistance $\leq 10^8 \Omega$
- Temperature Range:**
- 10°C approx. to +60°C approx.
 - short time to +80°C approx

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Stock Lengths m	Order No.
32	40	2.000	1.000	120	20	2-12-032-000
38	47	2.000	1.000	140	20	2-12-038-000
51	61	2.000	1.000	180	20	2-12-051-000
63	73	2.000	1.000	225	20	2-12-063-000
76	90	2.000	1.000	265	20	2-12-076-000
90	105	2.000	0.700	315	20	2-12-090-000
102	120	1.500	0.700	350	20	2-12-102-000
127	154	1.000	0.700	445	20	2-12-127-000
152	182	1.000	0.700	540	20	2-12-152-000

Delivery Variants: customer-specific product marking, diameters and lengths available on request

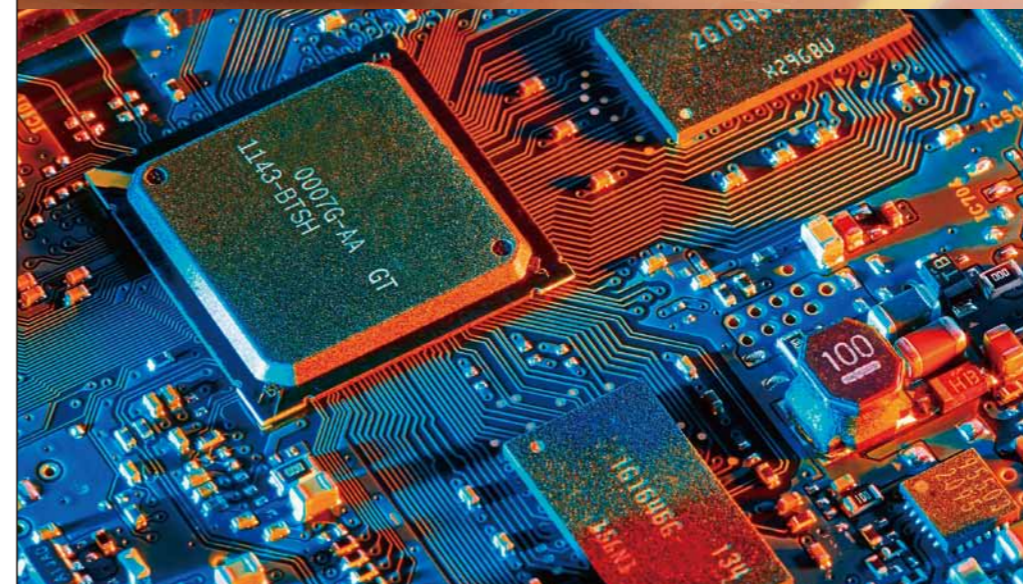

High Temperature Vehicle Exhaust Extraction System



26

J 6-6 PTFE FABRIC CLIP HOSE

**Applications:**

- for solids such as dust, powder, fibre and chip
- for gaseous media such as vapors and smoke
- for food and pharmaceutical industry
- for chemical industry

Construction:

- PTFE mechanically clamped into metal band

Material:

- wall: PTFE coated glass fabric
- wall thickness: 0.4mm approx.
- clamp: stainless steel

**Properties:**

- light-weight
- kink-proof
- anti-adhesive
- small bending radius
- strongly clamp into the wall
- odorless and tasteless
- good resistance to high temperature
- good resistance to alkalis, acids and chemicals
- good resistance to UV and ozone
- flame-retardant complied with FM 4910

Temperature Range:

- -40 °C approx. to +250 °C approx.

Specification:

- ø 76 to ø 305 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Stock Lengths m	Order No.
76	88	0.330	0.180	93	3	6-6-076-000
102	114	0.190	0.100	119	3	6-6-102-000
127	139	0.165	0.070	144	3	6-6-127-000
152	164	0.105	0.040	169	3	6-6-152-000
203	215	0.085	0.025	220	3	6-6-203-000
254	266	0.060	0.020	271	3	6-6-254-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 6-1 ALUMINUM FOIL AIR HOSE

**Applications:**

- exhaust air ventilation
- electrical component manufacture
- PCB manufacture
- for ventilation technology, clean rooms and electrical plants

Construction:

- two ply aluminum foil mechanically clamped into metal band

Material:

- wall: 0.1 mm thick aluminum foil
- spiral: 8 mm wide galvanized steel band
- silver

**Properties:**

- axially compressible
- bending radius equals 1.25 times of diameter
- small bending radius
- de-dusting

Temperature Range:

- -20 °C approx. to +130 °C approx.

Specification:

- ø 38 to ø 305 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
38	42	0.350	0.190	48	0.30	5	6-1-038-000
51	55	0.330	0.170	60	0.36	5	6-1-051-000
63	67	0.290	0.170	68	0.47	5	6-1-063-000
76	80	0.250	0.150	80	0.54	5	6-1-076-000
90	94	0.200	0.130	95	0.57	5	6-1-090-000
102	106	0.200	0.130	105	0.60	5	6-1-102-000
127	131	0.180	0.130	130	0.74	5	6-1-127-000
152	156	0.150	0.090	155	0.89	5	6-1-152-000
203	207	0.100	0.080	205	1.10	5	6-1-203-000
254	258	0.080	0.030	255	1.40	5	6-1-254-000
305	309	0.050	0.030	308	1.70	5	6-1-305-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request

J 6-2 ALUMINUM FOIL AND FABRIC AIR HOSE

**Applications:**

- drying equipment
- hot air suction and ventilation applications

Construction:

- wall: two ply aluminized fiberglass mechanically incorporating a high tensile steel helix sewn externally

Material:

- wall: aluminized fiberglass
- spiral: 8 mm galvanized steel band

Standard Color:

- white

**Properties:**

- high temperature resistance
- easy to install
- flame-retardant according to UL94-V0

Temperature Range:

- -20 °C approx. to +180 °C approx.

Specification:

- ø 51 to ø 305 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
51	56	0.330	0.170	61	0.40	5	6-2-051-000
63	68	0.290	0.170	73	0.51	5	6-2-063-000
76	81	0.250	0.150	86	0.60	5	6-2-076-000
90	95	0.200	0.130	100	0.64	5	6-2-090-000
102	107	0.200	0.130	112	0.67	5	6-2-102-000
127	132	0.180	0.120	137	0.84	5	6-2-127-000
152	157	0.150	0.090	162	1.01	5	6-2-152-000
203	208	0.100	0.060	213	1.30	5	6-2-203-000
254	259	0.080	0.030	264	1.60	5	6-2-254-000
305	310	0.050	0.030	315	1.90	5	6-2-305-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request

J 6-3 SILICONE FOIL AND FABRIC AIR HOSE

**Applications:**

- air direction
- used in place, where the exhaust gas temperatures are higher, for instance in construction machinery, harvesters, granules dryers in the plastics industry or for the extraction of hot air from ovens

Construction:

- wall: one ply silicone coated fiberglass mechanically clamped into stainless steel band

Material:

- wall: silicone fiberglass
- spiral: 8mm wide stainless steel band

**Standard Color:**

- grey

Properties:

- very good heat resistance
- leak-proof
- fibre reinforced
- small bending radius
- flame-retardant according to UL94-V0

Temperature Range:

- -70 °C approx. to +300 °C approx.

Specification:

- ø 51 to ø 305 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
51	55	0.180	0.170	61	0.37	5	6-3-051-000
63	67	0.150	0.170	73	0.48	5	6-3-063-000
76	80	0.130	0.150	86	0.55	5	6-3-076-000
90	94	0.100	0.130	100	0.59	5	6-3-090-000
102	106	0.100	0.130	112	0.65	5	6-3-102-000
127	131	0.090	0.130	137	0.80	5	6-3-127-000
152	156	0.080	0.090	162	0.99	5	6-3-152-000
203	207	0.050	0.060	213	1.30	5	6-3-203-000
254	258	0.030	0.030	264	1.60	5	6-3-254-000
305	309	0.020	0.030	315	1.90	5	6-3-305-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 6-4 PTFE AIR HOSE

**Applications:**

- for solids such as dust, powder, fibre and chip
- for gaseous media such as vapors and smoke
- for food and pharmaceutical industry
- for chemical industry

Construction:

- PTFE mechanically clamped into metal band

Material:

- wall: PTFE coated fiberglass
- clamp profile: stainless steel

**Properties:**

- anti-adhesive
- small bending radius
- strongly clamp into the wall
- odorless and tasteless
- good resistance to high temperature
- good resistance to alkalis, acids and chemicals
- good resistance to UV and ozone
- flame-retardant according to UL94-V0

Temperature Range:

- -70°C approx. to +250°C approx.

Specification:

- ø 51 to ø 305 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
51	55	0.180	0.170	61	0.35	5	6-4-051-000
63	67	0.150	0.170	73	0.45	5	6-4-063-000
76	80	0.130	0.150	86	0.52	5	6-4-076-000
90	94	0.100	0.130	100	0.55	5	6-4-090-000
102	106	0.100	0.130	112	0.61	5	6-4-102-000
127	131	0.090	0.130	137	0.76	5	6-4-127-000
152	159	0.080	0.090	162	0.93	5	6-4-152-000
203	207	0.050	0.060	213	1.10	5	6-4-203-000
254	258	0.030	0.030	264	1.30	5	6-4-254-000
305	309	0.020	0.030	315	1.70	5	6-4-305-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 6-5 STAINLESS STEEL AIR HOSE

**Applications:**

- hot ventilation in clean room
- semiconductor manufacture and chemical plant
- electrical component manufacture

Construction:

- stainless steel foil mechanically clamped into stainless steel spiral

Material:

- wall: 0.05 mm stainless steel foil
- spiral: stainless steel band

Properties:

- good resistance to alkalis and acids
- bendable
- high temperature
- rigid
- long life

Temperature Range:

- -70°C approx. to +400°C approx.

Specification:

- ø 51 to ø 305 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Bending Radius mm	Weight kg/m	Stock Lengths m	Order No.
51	55	0.180	0.210	61	0.36	2	6-5-051-000
63	67	0.150	0.210	73	0.47	2	6-5-063-000
76	80	0.130	0.210	86	0.54	2	6-5-076-000
102	106	0.100	0.150	112	0.60	2	6-5-102-000
127	131	0.090	0.150	137	0.74	2	6-5-127-000
152	156	0.080	0.130	162	0.89	2	6-5-152-000
203	207	0.050	0.100	213	1.10	2	6-5-203-000
254	258	0.030	0.060	264	1.40	2	6-5-254-000
305	309	0.020	0.060	315	1.70	2	6-5-305-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request

J 1-7 TPV FABRIC AIR HOSE

**Applications:**

- for welding gas extraction
- for air conditioning and ventilation technology

Construction:

- spring steel wire integrated in wall
- fabric-reinforced wall
- wall thickness 0.5 mm approx.

Material:

- wall: TPV coated fabric
- spiral: spring steel wire

Standard Color:

- black

**Properties:**

- compressible 4:1
- excellent resistance to alkalis, acids, chemicals, UV, and ozone
- flame-retardant according to UL94-HB

Temperature Range:

- -20 °C approx. to +150 °C approx.
- short time to +170 °C approx.

Specification:

- ø 51 to ø 406 mm

I.D. mm	O.D. mm	Overpressure bar	Vacuum bar	Stock Lengths m	Order No.
51	61	0.240	0.145	10	1-7-051-000
63	73	0.195	0.115	10	1-7-063-000
76	86	0.160	0.080	10	1-7-076-000
102	112	0.120	0.050	10	1-7-102-000
127	137	0.100	0.035	10	1-7-127-000
152	162	0.080	0.035	10	1-7-152-000
178	187	0.070	0.020	10	1-7-178-000
203	213	0.060	0.020	10	1-7-203-000
254	264	0.050	0.010	10	1-7-254-000
305	315	0.040	0.005	10	1-7-305-000
356	366	0.035	0.005	10	1-7-356-000
406	416	0.030	0.003	10	1-7-406-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 20-6 SUS MICROBEND AIR HOSE

**Applications:**

- for high temperature environment and equipment
- temperature-resistant to 400 °C approx.
- for semiconductor, chemical, electronics, wafer processing, LCD, secondary piping in clean room
- high-winding

Construction:

- wall thickness: 0.05mm

Standard Color:

- silver

**Properties:**

- low cost
- micro-bend, easy to construct
- high temperature resistant
- clean room available

Temperature Range:

- -70°C~+400°C

Specification:

- ø 51- 203mm

I.D. mm	O.D. mm	Stock Lengths m	Order No.
51	55	4	20-6-051-000
76	80	4	20-6-076-000
102	106	4	20-6-102-000
127	131	4	20-6-127-000
152	156	4	20-6-152-000
203	208	4	20-6-203-000

Delivery Variants: customer-specific product marking, diameters and lengths available on request



6 INDUSTRIAL TUBES

Industrial Tubes
Pneumatic Tools
Pressure Spraying

J 7-2 PU BRAIDED TUBE



Applications:

- pressure hose
- for compressed air
- for pneumatic tools
- for gaseous and liquid media

Construction:

- fabric reinforced wall
- smooth interior and exterior wall

Material:

- ester-polyurethane

Standard Color:

- blue

Properties:

- high tensile strength and tear resistant
- hydrolysis resistant
- small bending radius
- gas and liquid tight
- crush-proof
- very robust

Temperature Range:

- -40 °C approx. to +90 °C approx.

Specification:

- ø 4 to ø 12 mm

I.D. mm	O.D. mm	Working Pressure kgf/cm ²	Stock Lengths m	Order No.	Color
4	6	15	100	7-2-001-000	blue
5	8	15	100	7-2-002-000	blue
6.5	10	15	100	7-2-003-000	orange
8	12	15	100	7-2-004-000	blue
12	16	15	100	7-2-006-000	orange

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 7-3 PU TUBE



Applications:

- pressure hose
- for compressed air
- for pneumatic tools
- for gaseous and liquid media

Construction:


- smooth interior and exterior wall

Material:

- ether-polyurethane

Standard Color:

- blue, black, orange and transparent



Properties:

- high tensile strength and tear resistant
- hydrolysis resistant
- small bending radius
- gas and liquid tight
- crush-proof
- very robust

Temperature Range:

- -40 °C approx. to +90 °C approx.

Specification:

- ø 2.5 to ø 8 mm

I.D. mm	O.D. mm	Working Pressure kgf/cm ²	Stock Lengths m	Order No.
2.5	4	8	200	7-3-001-000
4	6	8	200	7-3-002-000
5	8	8	100	7-3-003-000
6.5	10	8	100	7-3-005-000
8	12	8	100	7-3-006-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 7-4 LDPE TUBE

**Applications:**

- pressure hose
- for electronics, mechanical and food industry
- for conveying water, oil and gas under normal working condition

Construction:

- smooth interior and exterior wall

Material:

- LDPE

Standard Color:

- black and transparent

**Properties:**

- odourless and tasteless
 - good resistance to mineral oil, chemicals, UV and ozone
 - small bending radius
 - free of softener and halogen
 - gas and liquid tight
 - food complied with FDA
- Temperature Range:**
- -20 °C approx. to +70 °C approx.
- Specification:**
- ø 2 to ø 9.53 mm

I.D. mm	O.D. mm	Working Pressure kgf/cm ²	Stock Lengths m	Order No.
2	3.175(1/8)	15	200	7-4-001-000
2	4	15	200	7-4-002-000
2.5	4	13	200	7-4-003-000
4	6	13	100	7-4-004-000
4.57	6.35(1/4)	10	100	7-4-005-000
6	8	10	100	7-4-006-000
7	9.53(3/8)	9	100	7-4-007-000
7.5	10	9	100	7-4-008-000
9	12	9	100	7-4-009-000
9.53(3/8)	12.7	9	100	7-4-010-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 7-5 NYLON TUBE

**Applications:**

- pressure hose
- for electronics, mechanical and food industry
- for conveying water, oil and gas under normal working condition

Construction:

- smooth interior and exterior wall

Material:

- PA6
- PA11 \ PA12

Standard Color:

- black and transparent

Properties:

- odourless and tasteless
 - hydrolysis resistant
 - good resistance to mineral oil, chemicals, UV and ozone
 - free of softener and halogen
 - gas and liquid tight
 - very robust
- Temperature Range:**
- -20 °C approx. to +70 °C approx.
- Specification:**
- ø 2 to ø 9.53 mm

I.D. mm	O.D. mm	Working Pressure kgf/cm ²	Stock Lengths m	Order No.
2	3.175(1/8)	30	200	7-5-001-000
2	4	36	200	7-5-002-000
2.5	4	16	200	7-5-003-000
4	6	17	100	7-5-004-000
4.57	6.35(1/4)	14	100	7-5-005-000
6	8	13	100	7-5-006-000
7	9.53(3/8)	14	100	7-5-007-000
7.5	10	14	100	7-5-008-000
9	12	14	100	7-5-009-000
9.53(3/8)	12.7	14	100	7-5-010-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 7-6 PTFE TUBE

**Applications:**

- pressure hose
- for heat exchanger
- for transportation of all kinds of corrosive medium, chemical material and medical intermediate.
- for transportation of hot and cold liquid and gas
- for insulates and adiabatic sleeve

Construction:

- smooth interior and exterior wall

Material:

- PTFE

Standard Color:

- white

**Properties:**

- food quality complied with FDA
 - odourless and tasteless
 - insulation
 - good resistance to alkalis, acids, and chemicals
 - small bending radius
 - free of softener and halogen
 - gas and liquid tight
- Temperature Range:**
- -73 °C approx. to +260 °C approx.
- Specification:**
- ø 2 to ø 9.53 mm

I.D. mm	O.D. mm	Working Pressure kgf/cm ²	Stock Lengths m	Order No.
2	4	15	100	7-6-001-000
2.5	4	12	100	7-6-002-000
4	6	10	100	7-6-003-000
4.76(3/16)	6.35	8	100	7-6-004-000
6	8	7	100	7-6-005-000
5	8	7	100	7-6-006-000
6.35(1/4)	9.53	7	100	7-6-007-000
8	10	6	100	7-6-008-000
7.5	10	6	100	7-6-009-000
11	13	5	100	7-6-010-000
10	12	5	100	7-6-011-000
9	12	5	100	7-6-012-000
9.53(3/8)	12.7	5	100	7-6-013-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request

J 7-7 FEP TUBE

**Applications:**

- pressure hose
- for solids
- for gaseous and liquid media

Construction:

- smooth interior and exterior wall

Material:

- FEP

Standard Color:

- transparent

**Properties:**

- food quality complied with FDA
 - odourless and tasteless
 - anti-adhesive
 - good resistance to alkalis, acids, and chemicals
 - small bending radius
 - free of softener and halogen
 - gas and liquid tight
 - high transparency
- Temperature Range:**
- -60 °C approx. to +200 °C approx.
- Specification:**
- ø 2 to ø 9.53 mm

I.D. mm	O.D. mm	Working Pressure kgf/cm ²	Stock Lengths m	Order No.
2	4	15	100	7-7-001-000
2.5	4	12	100	7-7-002-000
4	6	10	100	7-7-003-000
4.76(3/16)	6.35	8	100	7-7-004-000
6	8	7	100	7-7-005-000
5	8	7	100	7-7-006-000
6.35(1/4)	9.53	7	100	7-7-007-000
8	10	6	100	7-7-008-000
7.5	10	6	100	7-7-009-000
11	13	5	100	7-7-010-000
10	12	5	100	7-7-011-000
9	12	5	100	7-7-012-000
9.53(3/8)	12.7	5	100	7-7-013-000

Delivery Variants: customer-specific product marking, further diameters and lengths available on request

J 7-8 PAINT TUBE

**Applications:**

- pressurized paint
- paint transport Tank & Pump
- best for the pressurized solvent transport

Construction:

- smooth interior and exterior wall

Material:

- inner: Nylon
- outer: polyurethane

Standard Color:

- transparent

Properties:

- crush-proof
- excellent resistance against solvents

Temperature Range:

- -5 °C approx. to +70 °C approx.

Specification:

- ø 5 to ø 8 mm

I.D. mm	O.D. mm	Working Pressure kgf/cm ²	Stock Lengths m	Order No.
5	8	7	100	7-8-001-000
6.35	9.65	7	100	7-8-002-000
8	11	7	100	7-8-003-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 7-9 PAINT-TWIN TUBE

**Applications:**

- pressurized paint & Thinner transport
- pressurized paint transport Tank & Pump

Construction:

- the air hose and the pressurized solvent transport hose are paired

Material:

- inner: Nylon
- outer: polyurethane
- air hose material: PU
- air hose reinforcement: ester-polyurethane

Properties:

- crush-proof
- excellent resistance against solvents
- best for the pressurized solvent transport

Temperature Range:

- -5 °C approx. to +50 °C approx.

I.D. mm	O.D. mm	Working Pressure kgf/cm ²	Stock Lengths m	Order No.
air 6.5	10	6	100	7-9-001-000
paint 6.5	10	6	100	
air 6.5	10	6	100	7-9-002-000
paint 8	11	7	100	

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 10-1 HOSE CLAMP

**Applications:**

- clamp for attachment of light-duty hoses with smooth exterior

Material:

- clamp band: stainless steel
- screw: chrome-plated steel

Properties:

- easily and quickly fitted
- re-usable
- rust-proof

Clamping Range I.D. mm	Band Width mm	Order No.	Clamping Range I.D. mm	Band Width mm	Order No.
13-27	9	10-1-013-000	89-115	14	10-1-089-000
19-38	9	10-1-019-000	102-127	14	10-1-102-000
25-51	9	10-1-025-000	115-140	14	10-1-115-000
38-64	11	10-1-038-000	127-152	14	10-1-127-000
51-76	12	10-1-051-000	152-180	14	10-1-152-000
64-89	14	10-1-064-000	165-190	14	10-1-165-000
78-102	14	10-1-078-000	215-255	14	10-1-215-000

Delivery Variants: customer-specific product marking, further colors, diameters and lengths available on request

J 10-2 HOSE CLAMP

**Applications:**

- special clamp for attachment of exterior corrugated spiral hoses

Construction:

- stainless steel (VA).

Material:

- clamp band: stainless steel
- bridge: stainless steel
- screw: chrome-plated steel

Properties:

- practically leak-proof and firmly clamped with special bridge
- easily and quickly fitted geometry
- re-usable
- rust-proof
- very robust

Clamping Range I.D. mm	Order No.	Clamping Range I.D. mm	Order No.
27-47	10-2-027-000	115-135	10-2-115-000
35-55	10-2-035-000	145-165	10-2-145-000
45-65	10-2-045-000	185-205	10-2-185-000
55-75	10-2-055-000	195-215	10-2-195-000
65-85	10-2-065-000	215-235	10-2-215-000
85-105	10-2-085-000	245-265	10-2-245-000
95-115	10-2-095-000	295-315	10-2-295-000

J 10-3 PLASTIC FITTING HOSE CLAMP

**Applications:**

- special clamp for attachment of exterior corrugated spiral hoses
- can install only by hands, easily and quickly fitted

Material:

- clamp: stainless steel
- bridge: stainless steel
- connector: plastic steel

Clamping Range I.D. mm	Order No.	Clamping Range I.D. mm	Order No.
27-47	10-3-027-000	115-135	10-3-115-000
35-55	10-3-035-000	145-165	10-3-145-000
45-65	10-3-045-000	185-205	10-3-185-000
55-75	10-3-055-000	195-215	10-3-195-000
65-85	10-3-065-000	215-235	10-3-215-000
85-105	10-3-085-000	245-265	10-3-245-000
95-115	10-3-095-000	295-315	10-3-295-000

J 10-4 PINTLE HOSE CLAMP

**Applications:**

- clamp for high-pressure environment

Material:

- clamp band: stainless steel
- bridge: steel pintle

Clamping Range I.D. mm	Order No.	Clamping Range I.D. mm	Order No.
17-19	10-4-017-000	48-51	10-4-048-000
20-22	10-4-020-000	52-55	10-4-052-000
23-25	10-4-023-000	56-59	10-4-056-000
26-28	10-4-026-000	60-63	10-4-060-000
29-31	10-4-029-000	64-67	10-4-064-000
32-35	10-4-032-000	68-73	10-4-068-000
36-39	10-4-036-000	74-79	10-4-074-000
40-43	10-4-040-000	80-85	10-4-080-000
44-47	10-4-044-000		

J 11-1 RUBBER CONNECTOR



Applications:

- soft sleeve for interior and exterior connections

Material:

- special rubber

Standard Color:

- white and black

Temperature Range:

- -20 °C approx. to +125 °C approx.

Suitable For Hose:

- J 1-1 • J 1-10
- J 1-2 • J 2-1
- J 1-3 • J 2-7
- J 1-4 • J 5-1
- J 1-5

I.D. mm	Order No.	I.D. mm	Order No.
50	11-1-050-000	125	11-1-125-000
63	11-1-063-000	150	11-1-150-000
76	11-1-076-000	200	11-1-200-000
100	11-1-100-000	250	11-1-250-000

J 11-2 STAINLESS STEEL CONNECTOR



Applications:

- to connect, reduce and extend hose lines

Material:

- stainless steel (VA) 1.4301/ AISI 304/ W2

Properties:

- easily and quickly fitted

Temperature Range:

- +400 °C approx.

I.D. mm	Order No.
50	11-2-050-000
63	11-2-063-000
76	11-2-076-000
100	11-2-100-000
125	11-2-125-000
150	11-2-150-000
200	11-2-200-000
250	11-2-250-000

J 11-3 SILICONE CONNECTOR



Applications:

- soft sleeve for interior and exterior connections

Material:

- wall: silicone

Standard Color:

- red

Temperature Range:

- -40 °C approx. to +260 °C approx.

Suitable For Hose:

- J 6-1
- J 6-2
- J 6-3
- J 6-4
- J 6-5

I.D. mm	Order No.	I.D. mm	Order No.
50	11-3-050-000	125	11-3-125-000
63	11-3-063-000	150	11-3-150-000
75	11-3-075-000	200	11-3-200-000
100	11-3-100-000	250	11-3-250-000

J 11-4 HOSE INSULATOR



Applications:

- suitable for heat and cold transport hose
- thermal insulation

Material:

- high density compound foam

Standard Color:

- black

Construction:

- adjustable Velcro strap

Temperature Range:

- -20 °C approx. to +160 °C approx.

I.D. inch	Wall thickness mm	Stock Lengths m	Order No.
2	6	1	11-4-002-000
3	6	1	11-4-003-000
4	6	1	11-4-004-000
5	6	1	11-4-005-000
6	6	1	11-4-006-000
8	6	1	11-4-008-000

J 11-5 EVA HOSE CONNECTOR



Application:

- soft sleeve for interior and exterior connections

Material:

- rubber

Standard Color:

- white and black

Temperature Range:

- -20 °C approx. to +125 °C approx.

Suitable For Hose:

- J 3-2

I.D. mm	Order No.
25	11-5-025-000
32	11-5-032-000
38	11-5-038-000
50	11-5-050-000

J 11-6 STAINLESS STEEL CONNECTOR



Applications:

- transmission of fluid and granule

Material:

- stainless steel

Suitable For Hose:

- J 2-4
- J 2-5
- J 2-6

I.D. mm	Order No.	I.D. mm	Order No.
25	11-6-025-000	76	11-6-076-000
32	11-6-032-000	102	11-6-102-000
38	11-6-038-000	127	11-6-127-000
51	11-6-051-000	152	11-6-152-000
63	11-6-063-000		

J3-4 HDPE EL RIGID BEND HOSE



Applications:

- for air, fume extraction and liquid supply at low pressures
- for conveyance of powders, granules and dust extraction
- for woodworking dust
- portable air conditioner venting hose

Construction:

- wall: HDPE

Standard Color:

- black

Properties:

- self-supporting
- superior resistance to alkalis and acids
- simply increase or decrease the size
- jointing of lengths
- able to maintain shape
- electrical and surface resistance $\leq 10^6 \Omega$

Temperature Range:

- $-20^\circ\text{C} \sim +70^\circ\text{C}$

J20-5 VACUUM LIFT HOSE



Applications:

- for vacuum lift equipment

Material:

- wall: rubber
- spiral: elastic steel wire

Properties:

- high working pressure

Temperature Range:

- $-20^\circ\text{C} \sim +150^\circ\text{C}$

Specification:

- \varnothing 100-180mm

J 1-12 PVC ALUMINUM FLEX HOSE



Applications:

- for transfer of air, air conditioning ductwork

Material:

- wall: PVC with Aluminum
- spiral: spring steel wire

Properties:

- small bending radius
- very good low temperature flexibility
- kink-proof
- outside PVC protection

Temperature Range:

- -20°C approx. to $+80^\circ\text{C}$ approx.

BRAIDED TUBE



Applications:

- for conveying water, oil, air pressure tube

Material:

- inner: PVC, NBR, PU, EPDM, etc.
- outer (fabric): PP, Nylon, Kevlar, etc.

CUSTOMER SPECIFIC CONNECTORS



Applications:

- for hose connector processing for automotive, pneumatic lines, oiling machine and machinery industry
- for all tube connector processing, we provide customization service for your needs

STRETCH HOSE



- Applications: for powdery solids such as dust, powder and fibre

Material:

- PVC, PU

Properties:

- compressible 1:7
- freely stretch and compression customer-specific

PNEUMATIC SPIRAL TUBE



Applications:

- for pneumatic lines, pressure tube for conveying water, oil and air

Material:

- Nylon, PU, PE, PTFE, FEP

Properties:

- freely stretch and compression

CORRUGATED TUBE



- Applications: for electrical, semiconductor, PCB, LCD, chemical plant

Material:

- PTFE, FEP, PFA (PFA 951HP or PFA451H)

Properties:

- good resistance to alkalis and acids, chemicals
- high transparency
- low coefficient of friction, anti-sticking customer-specific

EXHAUST HOSE



- Applications: exhaust hose for modified car

Material:

- TPV

Construction:

- wall thickness 0.5 mm
- TPV mechanically clamped into width 8 mm stainless steel band

Properties:

- good resistance to high temperature