

VIAVAC GBXL

FLAT GLASS LIFTING AND PLACING UP TO 1.000 KG




VACUUM GLASS LIFTER



VIAVAC GBXL

FLAT GLASS LIFTING AND PLACING UP TO 1.000 KG

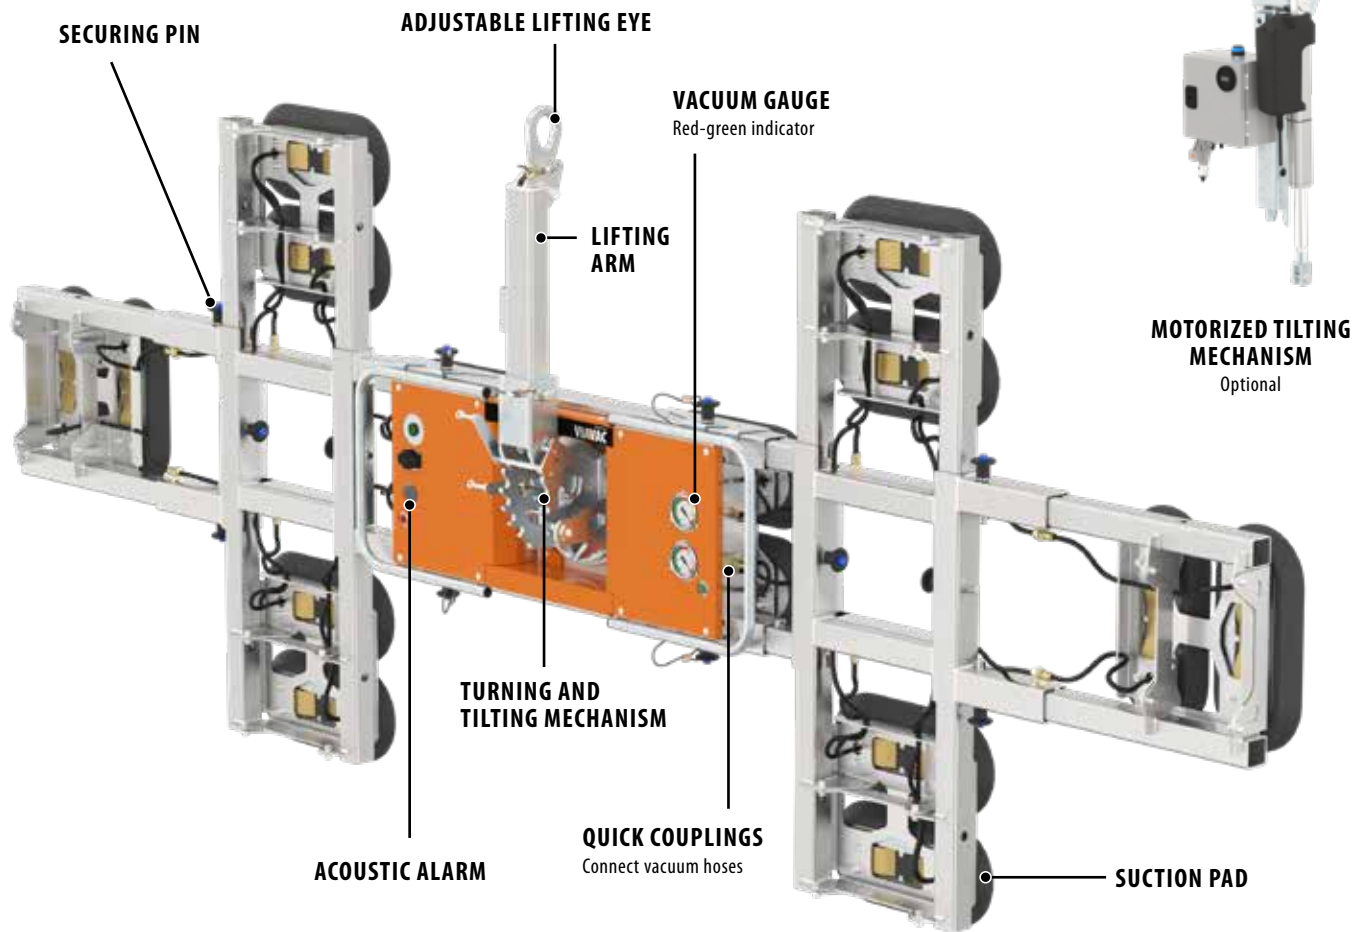

TRANSPORT FRAME
Easy to transport (optional)



SHOR LIFTING EYE
Optional



RADIO REMOTE CONTROL
Optional

FUNCTIONS

- 90° mechanism with locking facility every 18°
- 360° rotation with locking facility in 4 positions
- Extra short lifting eye for lifting in narrow spaces (optional)
- Motorized tilting mechanism for even faster installation (optional)
- Radio remote control for suction & release (optional)

SPECIFICATIONS

- 2 independent vacuum circuits for double safety
- Integrated vacuum gauges with red / green indication
- Audible and visible low vacuum warning
- Low-battery warning
- Vacuum buffer tanks with non-return valves

Configuration	GBXL-4P	GBXL-8P	XL-16P
• Lifting capacity	250 kg	500 kg	1.000 kg
• Machine weight	68 kg	116 kg	165 kg

Complies with European standard EN 13155

GBXL-4P
250 KG

GBXL-8P
500 kg

GBXL-16P
1.000 kg

